

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 March 2005 (10.03.2005)


PCT

(10) International Publication Number  
**WO 2005/021055 A1**

- (51) International Patent Classification<sup>7</sup>: **A61L 9/12**, A01M 1/20 (74) Agent: MCSTEA, John, Anthony; Ueberlandstrasse 138, CH-8600 Duebendorf (CH).
- (21) International Application Number: PCT/CH2004/000529 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 20 August 2004 (20.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0320510.1 2 September 2003 (02.09.2003) GB (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): GIVAUDAN SA [CH/CH]; Chemin de la Parfumerie 5, CH-1214 Vernier (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BROWN, Collin [GB/GB]; 135 Binfield Road, Bracknell Berkshire RG42 2BD (GB). NAISH, Guy Edward [GB/GB]; 28 Mullein Road, Bicester Oxfordshire OX26 3WE (GB). GOHIL, Kishen [GB/GB]; 21 Consfield Av., New Malden Surrey KT3 6HB (GB).
- Published:  
— with international search report

[Continued on next page]

(54) Title: DISSEMINATING DEVICE FOR VOLATILE LIQUID

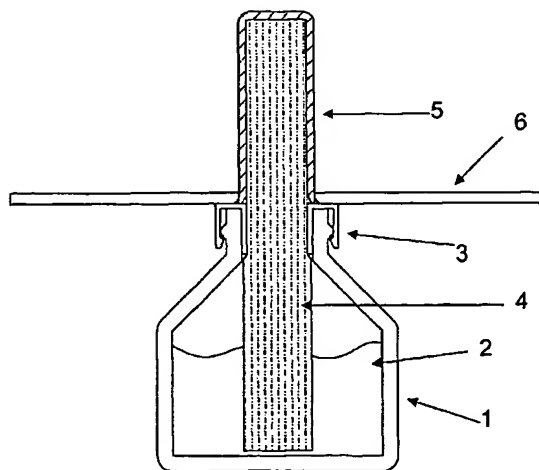

(57) Abstract: An apparatus adapted to disseminate volatile liquid, such as a fragrance, into an atmosphere comprises a reservoir (1) containing volatile liquid and, extending into and therefrom, an essentially cylindrical liquid transfer member (4) that transfers liquid from the reservoir to an evaporating surface (6) through which the transfer member passes by means of a hole in the evaporating surface. The evaporating surface comprises a rigid sheet that extends essentially laterally from the transfer member and bears on its surface capillary channels adapted to accept liquid from the transfer member and spread it over the surface of the evaporating surface. The transfer member is elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, is held in a compressed form of diameter smaller than that of the hole, such that, when the compression is released, the transfer member expands into liquid transfer contact with the evaporating surface. This ensures optimal liquid transfer contact between transfer member and evaporating surface.

**WO 2005/021055 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DISSEMINATING DEVICE FOR VOLATILE LIQUID

This invention relates to apparatus for disseminating volatile liquids into an atmosphere.

- 5 One very common apparatus for disseminating a volatile liquid, such as a fragrance, an insecticide, a fungicide, a medicament, etc., into an atmosphere consists of a porous transfer member, such as a fibrous wick, that is in contact with a reservoir of volatile liquid. Liquid rises up this wick and evaporates into the atmosphere. This system has drawbacks, such as the low surface area for evaporation. It has been proposed to overcome this disadvantage by
- 10 fitting to such a transfer member an external capillary sheet, that is, a sheet extending essentially perpendicularly from the transfer member and that comprises channels of capillary dimensions, to which volatile liquid can pass and travel along for evaporation. This sheet generally contacts the transfer member by means of a hole in the sheet through which the transfer member protrudes and within which it fits snugly, at least some of these channels
- 15 contacting the transfer member such that liquid can transfer from the member to the sheet ("liquid transfer contact").

One of the problems encountered with such an apparatus is securing the necessary liquid transfer contact. If, to allow easy fitting, the hole in the sheet is too big with respect to the

20 wick diameter, even if only slightly so, the transfer of liquid will be diminished, and may not even take place at all. On the other hand, if the hole is too small and the sheet has to be forced on to the wick, the wick may be damaged. In addition, the desired good liquid transfer may not still take place, because that part of the sheet surrounding the hole may be deformed slightly in the direction of the top of the wick, thus reducing liquid transfer contact or even

25 eliminating it completely. Moreover, the precision engineering that would be necessary to make a wick and sheet that matched with the necessary exactness would result in an unacceptably high price for a mass market production article, especially as fibrous wicks are extremely difficult to engineer accurately.

- 30 It has now been found that these problems can readily be overcome by a new construction. The invention therefore provides an apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir containing volatile liquid and, extending into and therefrom, an essentially cylindrical liquid transfer member that transfers liquid from

the reservoir to an evaporating surface through which the transfer member passes by means of a hole in the evaporating surface, the evaporating surface comprising a rigid sheet that extends essentially laterally from the transfer member and that bears on its surface capillary channels adapted to accept liquid from the transfer member and spread it over the surface of the evaporating surface, the transfer member being elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, being held in a compressed form of diameter smaller than that of the hole, and, on release of the compression, expandable into liquid transfer contact with the evaporating surface.

10

The invention additionally provides a method of ensuring optimum liquid transfer contact between a transfer member adapted to transfer volatile liquid to be disseminated into an atmosphere and a capillary channel-bearing evaporating surface that makes liquid transfer contact with the transfer member by means of a hole through which the transfer member protrudes, comprising supplying the transfer member in compressed form, such that its compressed diameter is smaller than that of the hole but its uncompressed diameter is at least equal to that of the hole, and, in putting the apparatus into service, of releasing the compression.

20 The reservoir and the evaporating surface may be any suitable reservoir or any suitable evaporating surface made of any suitable material. Reservoirs are well known to the art and suitable evaporating surfaces are described in, for example, co-pending International patent application No. PCT/CH 2004/000102.

25 The liquid transfer member may be any suitable member, with the proviso that it must be capable of being elastically compressed to a diameter smaller than its uncompressed diameter, such that

(a) the compressed diameter is sufficiently small such that the external diameter of the sleeve matches that of the hole in the evaporating surface; and

30 (b) the uncompressed diameter is greater than that of the hole in the evaporating sheet.

Provided that the liquid transfer member meets the compressibility criteria specified hereinabove, the material from which the transfer member is made may be any suitable material. Although it is advantageously any of the materials already known and used in the manufacture of air freshener wicks and the like, from the point of view of availability, reliability and cheapness, it is not restricted to these, and the skilled person will readily be able to select a suitable material for any given application. Typical examples of suitable transfer member material include natural fibres such as cellulose and synthetic fibres such as polyester, nylon and polypropylene. A typical example of a polyester fibrous wick contained within a non-woven outer sheath is the Sorbarod range of products from Baumgartner Fibertec SA, Crisser-Lausanne, Switzerland.

The means by which the transfer member is compressed and held in a compressed state may be any suitable means. For example, the compression retention means for the transfer member may be a cylindrical member, typically a sleeve or cap of material sufficiently rigid to resist the pressure of the transfer member seeking to return to normal size. This is typically a plastics material, but other materials such as ceramics or metals may be used, if desired. A cap is a preferred member, as it prevents leakage or evaporation. The compression of the transfer member may be achieved by any convenient means, for example, by extruding the transfer member in compressed form into the retention means.

The compression retention means described hereinabove may be held in place by any suitable means prior to its removal when the apparatus is put into operation. For example, if it is a cap, it may have a screw fitting that cooperates with a corresponding screw fitting on the neck of the reservoir. In another embodiment, it may be part of the closure of the reservoir and able to be broken off when operation of the apparatus is desired, for example, by making weak part of the cap, so that it will break at that point.

The evaporating surface is a capillary sheet, that is, a sheet of rigid material that comprises in at least one of its surfaces capillary channels. At least some of these channels are in liquid transfer contact

The apparatus according to the invention may be supplied in one part, or it may be supplied in two parts, evaporating surface and reservoir/transfer member/compression retention means. To put such an apparatus into operation, the evaporating surface is put over the sleeve, and the sleeve is then removed. The evaporating member is held in such a position  
5 that the subsequent expansion of the transfer member will bring it into liquid transfer contact with the evaporating surface. Any suitable means may be used here, for example, a shoulder built into a cap that both covers the transfer member and acts as the sleeve. This cap can be designed to snap off at an appropriate place by its being twisted, allowing the transfer member to expand.

10

The invention is further described with reference to the drawing, which depict a preferred embodiment and is not intended to be limiting in any way on the scope of the invention.

A reservoir 1 contains a volatile liquid (2), to be disseminated into an atmosphere. The  
15 reservoir has the form of a bottle with a neck, into which neck fits an insert 3. The insert has a central orifice, through which tightly fits a porous wick 4. The wick extends from near the bottom of the reservoir through the insert 3 into the atmosphere, thus providing the only means for the liquid leave the reservoir and reach the atmosphere. That part of the wick 4 protruding from the insert 3 is completely covered by a cap 5 that extends down to the insert  
20 3. This part of the wick is compressed from its natural size and is held at reduced size by the cap 5. Around the cap 5 is fitted a capillary sheet 6, by means of an orifice in the sheet whose diameter matches the outer diameter of the cap 5, but which diameter is smaller than the normal diameter of the wick 4.

25 When the cap 5 is removed, the wick 4 expands to its normal diameter. In doing this, it makes tight contact with the orifice in the capillary sheet 6. This contact holds the capillary sheet 6 tightly in place and allows the passage of liquid from the wick 4 to the capillary sheet 6 for evaporation into the atmosphere.

30


## Claims:

1. An apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir (1) containing volatile liquid (2) and, extending into and  
5 therefrom, an essentially cylindrical liquid transfer member (4) that transfers liquid from the reservoir to an evaporating surface (6) through which the transfer member passes by means of a hole in the evaporating surface, the evaporating surface comprising a rigid sheet that extends essentially laterally from the transfer member and that bears on its surface capillary channels adapted to accept liquid from the  
10 transfer member and spread it over the surface of the evaporating surface, the transfer member being elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, being held in a compressed form of diameter smaller than that of the hole, and, on release of the compression, expandable into liquid transfer contact with the  
15 evaporating surface.
2. An apparatus according to claim 1, in which the transfer member is held in compressed form by a rigid cylindrical member (5).
- 20 3. An apparatus according to claim 2, in which the cylindrical member has an external diameter that is the same as the diameter of the hole.
4. An apparatus according to claim 2, in which the apparatus is a single unit.
- 25 5. An apparatus according to claim 2, in which the apparatus consists of two units, with a separate evaporating surface that is adapted to be fitted over a cylindrical member prior to the removal of the cylindrical member.
- 30 6. A method of ensuring optimum liquid transfer contact between a transfer member adapted to transfer volatile liquid to be disseminated into an atmosphere and a capillary channel-bearing evaporating surface that makes liquid transfer contact with the transfer member by means of a hole through which the transfer member protrudes,

comprising supplying the transfer member in compressed form, such that its compressed diameter is smaller than that of the hole but its uncompressed diameter is at least equal to that of the hole, and, in putting the apparatus into service, of releasing the compression.



1/1

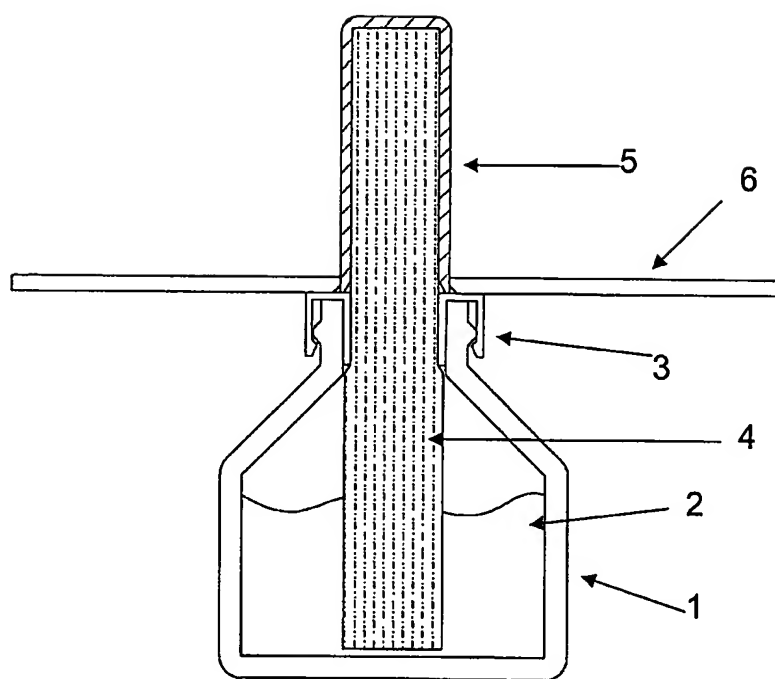

# INTERNATIONAL SEARCH REPORT

National Application No  
PC 1/CH2004/000529

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61L9/12 A01M1/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61L A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 522 270 A (BERGER PRODUITS) 2 September 1983 (1983-09-02)	1
A	page 2, line 6 - line 38; figures 1,2 -----	6
A	FR 2 635 955 A (OREAL) 9 March 1990 (1990-03-09) page 5, line 32 - page 6, line 27; figure 1 -----	1-6
A	US 2002/136542 A1 (WOLPERT CHRISTOPHER J ET AL) 26 September 2002 (2002-09-26) the whole document -----	1,6
P,A	WO 2004/006968 A (FIRMENICH & CIE ; TRANZEAT LYSE (FR); O'LEARY NICHOLAS (GB)) 22 January 2004 (2004-01-22) page 10, line 22 - line 31 page 11, line 29 - line 30; figure 3 ----- -/-	1-6

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

14 October 2004

Date of mailing of the international search report

22/10/2004

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Marti, P

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CH2004/000529

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 331 014 A (C T R CONSULTORIA TECNICA E RE) 30 July 2003 (2003-07-30) paragraph '0011! - paragraph '0015!; figure 7	1-6
A	US 4 739 928 A (O'NEIL WILLIAM J) 26 April 1988 (1988-04-26) column 3, line 25 - line 51; figure 6	1-6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

RU 1/CH2004/000529

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2522270	A	02-09-1983	FR 2522270 A1	02-09-1983
			FR 2539031 A2	13-07-1984
FR 2635955	A	09-03-1990	FR 2635955 A1	09-03-1990
US 2002136542	A1	26-09-2002	AU 1153002 A	22-04-2002
			AU 1775902 A	22-04-2002
			CA 2425304 A1	08-04-2003
			CA 2425589 A1	18-04-2002
			EP 1334313 A2	13-08-2003
			WO 0231413 A2	18-04-2002
			WO 0230220 A1	18-04-2002
			US 2002136886 A1	26-09-2002
WO 2004006968	A	22-01-2004	WO 2004006968 A1	22-01-2004
EP 1331014	A	30-07-2003	US 2003132308 A1	17-07-2003
			EP 1331014 A2	30-07-2003
US 4739928	A	26-04-1988	AU 581788 B2	02-03-1989
			AU 6369386 A	16-04-1987
			CA 1274491 A1	25-09-1990
			GB 2181649 A ,B	29-04-1987
			HK 99591 A	13-12-1991
			IE 59756 B1	23-03-1994
			JP 62094169 A	30-04-1987
			KR 9500064 B1	09-01-1995
			NZ 217830 A	26-02-1990
			SG 82491 G	22-11-1991